



HFR30A06

Hyperfast Recovery Rectifier

Features


- ★ Fast switching for high efficiency
- ★ Low noise
- ★ $T_{rr} < 40\text{ns}$
- ★ Low reverse leakage current
- ★ High surge current capability
- ★ High voltage super FRD
- ★ PFC application

Mechanical Data

- ★ Case: Molded plastic TO-220AC
- ★ Epoxy: UL 94V-0 rate flame retardant
- ★ Terminals: Solderable per MIL-STD-202 method 208
- ★ Polarity: As marked
- ★ Mounting position: Any
- ★ Weight: 2.07 grams

Voltage Range 600 V
Current 30 Ampere

TO-220AC

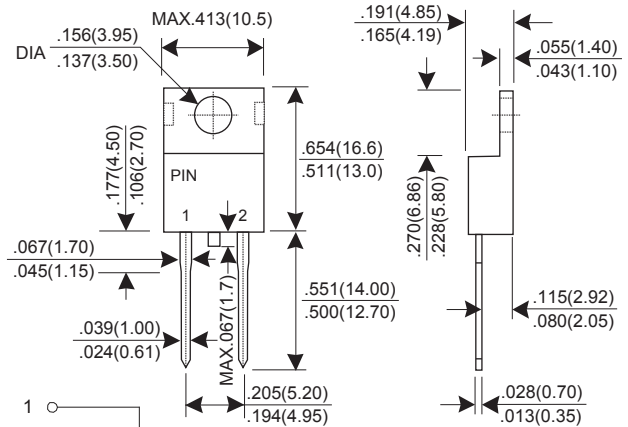

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

PARAMETER	SYMBOL	HFR30A06			UNIT
		Min.	Typ.	Max.	
Recurrent Peak Reverse Voltage	VRRM	-	-	600	V
RMS Voltage	VRMS	-	-	420	V
DC Blocking Voltage	VDC	-	-	600	V
Maximum Average Forward Rectified Current @ Tc=120°C	IF(AV)	-	-	30	A
Peak Forward Surge Current, 8.3ms single Half sine-wave superimposed on rated load (JEDEC method)	IFSM	-	-	325	A
Instantaneous Forward Voltage @ 30 A	VF	-	-	2.1	V
DC Reverse Current @TA=25°C	IR	-	-	250	µA
At Rated DC Blocking Voltage @TA=150°C		-	-	1000	µA
Maximum Reverse Recovery Time (Note 1)	Trr	-	-	40	nS
Typical junction Capacitance (Note 2)	CJ	-	85	-	pF
Maximum Thermal Resistance (Note 3)	RθJC	-	-	1.2	°C/W
Operating Junction and Storage Temperature Range	TJ, TSTG	-65	-	175	°C

NOTES : (1) Reverse recovery test conditions $I_F = 1\text{A}$, $dI_F/dt = 200\text{A}/\mu\text{s}$.
(2) Junction capacitance test conditions $V_R = 10\text{V}$, $I_F = 0\text{A}$.
(3) Thermal Resistance junction to case.

RATINGS AND CHARACTERISTIC CURVES HFR30A06

FIG. 1 - FORWARD CURRENT DERATING CURVE

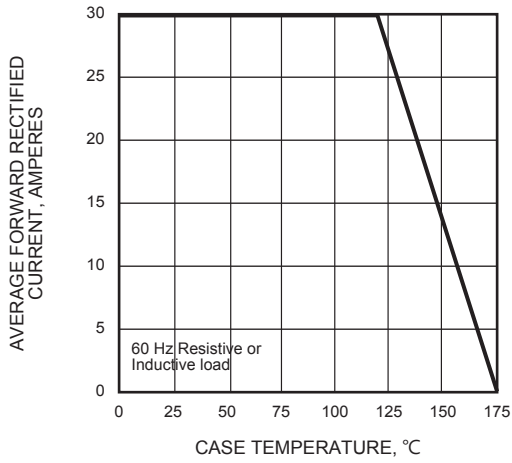


FIG. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

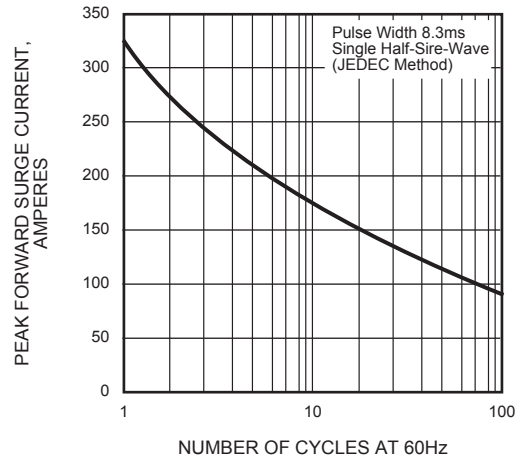


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

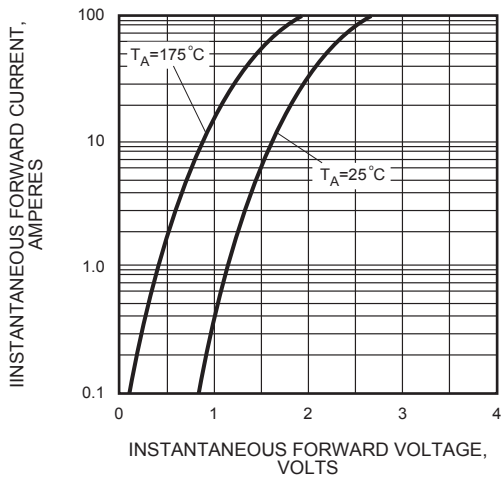


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS

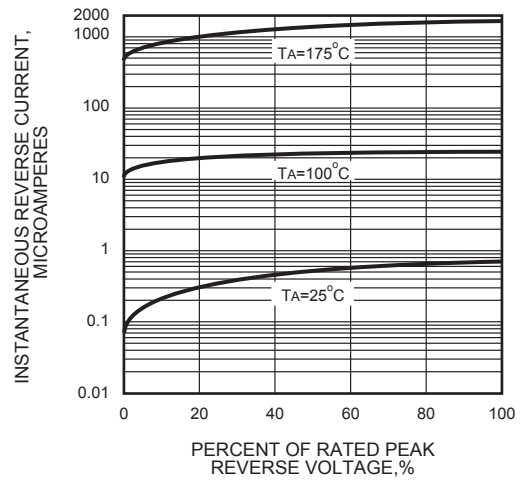


FIG. 5 - TYPICAL JUNCTION CAPACITANCE

